



Installation Step:

- 1 Put the TV in a firm place, which must support the weight of the TV. To avoid risks, please do not expose the TV to hot or humid places (as well as near lights, candles heaters), and do not block the ventilation on the back of the TV.

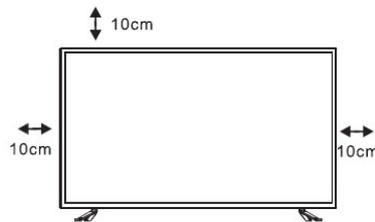


- 2 Connect the antenna cable to the antenna input terminal of the TV.
- 3 Connect the TV power cord (100-240V ~ 50/60Hz)
- 4 Press the power button of the TV and the indicator light will turn green. If the indicator light is in standby mode (the light is red), press the power button on the remote control or TV panel.

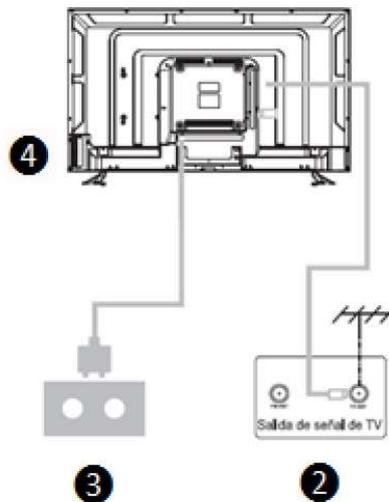


Installation of the TV base:

- 1 Turn the TV with the LED screen down on a smooth and flat surface. Make sure there is no material strange on the flat surface.
- 2 Put the base on the buckle and fix it.

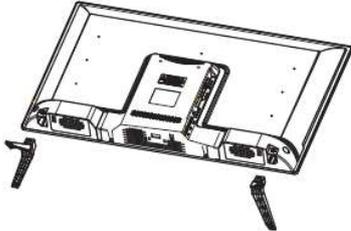

Installing the TV on the wall:


- 1 First, put the TV on a flat table, on which you must put something soft to prevent the panel from being scratched or damaged.
- 2 Use the screwdriver to remove the 4 screws that hold the base of the TV (the direction of the arrows, reference image 1) and, remove the base (guard the screws and the base carefully).
- 3 Make or buy a support with which the TV can be mounted on the wall, according to the size of the part marked with the arrows in image 2 and 3.
- 4 Make 4 holes in the wall in the right place (the size is only for reference) and put the part of the bracket that goes on the wall with the 4 screws (optional parts).
- 5 According to step 4, use a screwdriver to put the screws to the part of the bracket that goes on the TV, for wall mounting.

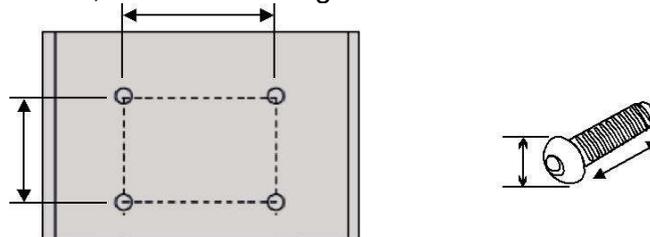

Note:

1. Wall mounting bracket is optional part.
2. When installing the TV, there should be no other items around or in front, please keep distance from other items.
3. When install the TV. Ask qualified personnel about safety to avoid risks.
4. Installation images are for reference only.
5. Please follow the instructions in the manual about the installation of the TV.
6. The VESA wall mount kit is compatible with this TV.

Operation of the remote control

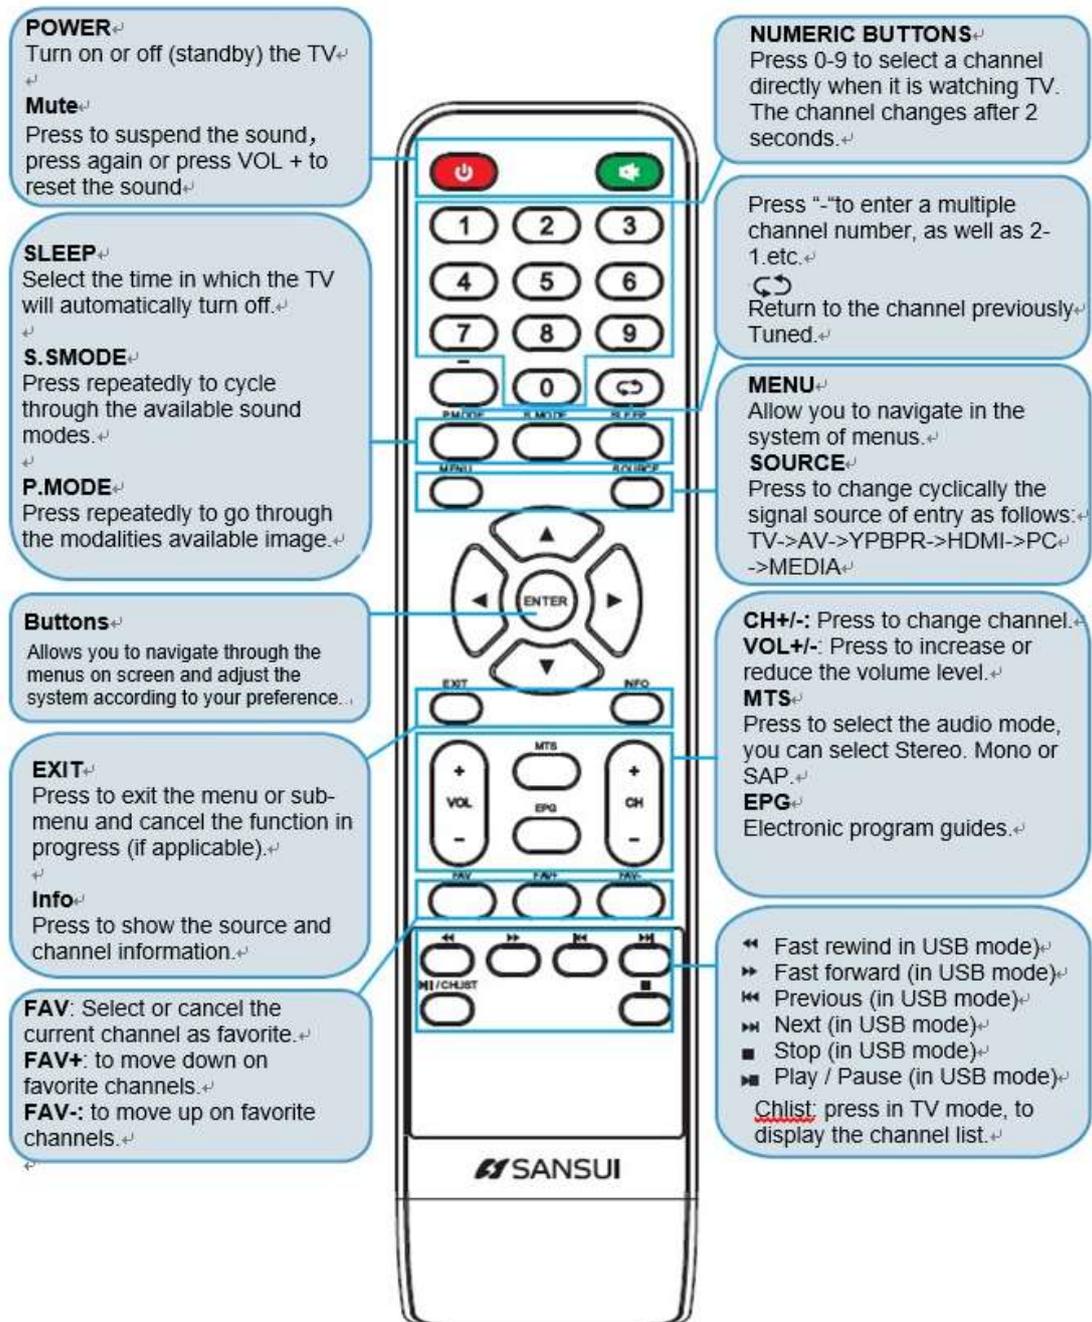

Installation of the batteries in the remote control:

1. Open the back cover.
2. Use AAA batteries. When inserting the batteries, make sure that the polarity is correct, that is, that the "+" marks are oriented as indicated in the compartment.
3. Position the back cover.

To prevent battery leakage that may cause damage to the remote control.

1. Install the batteries correctly according to what is indicated on the remote control.
2. Do not mix the batteries, (old and new, carbon and alkaline, etc.) Remove the batteries from the control remote when it is not going to be used for a long period of time.